Doc. Number :

□ Tentative Specification
□ Preliminary Specification
■Approval Specification

MODEL NO.: M185BGE
SUFFIX: P03

Customer:

APPROVED BY **SIGNATURE**

Name / Title _____

Note
Product Version C1

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By
吳柏勳	柯直孝	徐欣怡

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

- CONTENTS -

1. GENERAL DESCRIPTION 4
1.1 OVERVIEW 4
1.2 GENERAL SPECIFICATI0NS 4
2. MECHANICAL SPECIFICATIONS 4
3. ABSOLUTE MAXIMUM RATINGS 4
3.1 ABSOLUTE RATINGS OF ENVIRONMENT 4
3.2 ELECTRICAL ABSOLUTE RATINGS 5
3.2.1 TFT LCD MODULE 5
3.3 ABSOLUTE RATINGS OF ENVIRONMENT (OPEN CELL) 5
4. ELECTRICAL SPECIFICATIONS 6
4.1 FUNCTION BLOCK DIAGRAM 6
4.2. INTERFACE CONNECTIONS 6
4.3 ELECTRICAL CHARACTERISTICS 8
4.4 Vcc POWER DIP CONDITION 10
4.5 LVDS DATA MAPPING TABLE 10
4.6 COLOR DATA INPUT ASSIGNMENT 10
4.7 DISPLAY TIMING SPECIFICATIONS 11
4.8 POWER ON/OFF SEQUENCE 13
5. OPTICAL CHARACTERISTICS 14
5.1 TEST CONDITIONS 14
5.2 OPTICAL SPECIFICATIONS 14
5.3 Flicker Adjustment 18
6. RELIABILITY TEST ITEM 19
7. LABEL 20
7.1 CMI OPEN CELL LABEL 20
8. PACKING 21
8.1 Packing Information 21
8.2 CARTON 21
8.3 PALLET 22
9. PRECAUTIONS 23
9.1 HANDLING PRECAUTIONS 23
9.2 SAFETY PRECAUTIONS 23
9.3 OTHER 23
10. OUTLINE DRAWING 23

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

REVISION HISTORY

Version	Date	Page	Description
3.0	FEB.21, 2012	All	Spec Ver.1.0 was first issued.
3.1	May 31, 2012		Section 8 & 9 Hard Box packing

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

1. GENERAL DESCRIPTION

1.1 OVERVIEW

The M185BGE-P03 is a 18.5” TFT LCD cell with driver ICs and a 30-pins-1ch-LVDS circuit board.

The product supports 1366 x 768 HDTV mode and can display up to 16.7M colors. The backlight unit is not built in.

1.2 GENERAL SPECIFICATI0NS

Item	Specification	Unit	Note
Screen Size	18.5” real diagonal		
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1366 x R.G.B. x 768	pixel	-
Pixel Pitch	0.3 (H) x 0.3 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	16.7M	color	-
Transmissive Mode	Normally white	-	-
Surface Treatment	Anti-Glare coating (Haze 25%), Hard coating (3H)	-	-
Power Consumption	6.3	Watt	-

2. MECHANICAL SPECIFICATIONS

Item	Min.	Typ.	Max.	Unit	Note
Weight	-	320.4	340.4	g	-
I/F connector mounting position	The mounting inclination of the connector makes the screen center within ±0.5mm as the horizontal.			-	(2)

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

(2) Connector mounting position

(3) Please refer to sec.3.1 for more information of power consumption.

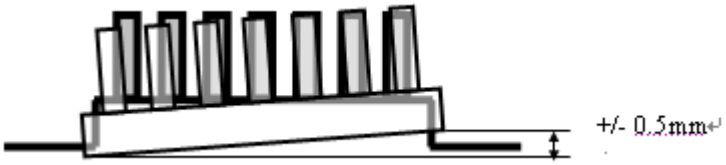

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T_{ST}	-20	+60	ºC	(1)
Operating Ambient Temperature	T_{OP}	0	+50	ºC	(1), (2)

Note (1) (a) 90 %RH Max. (Ta <= 40 ºC).

(b) Wet-bulb temperature should be 39 ºC Max. (Ta > 40 ºC).

(c) No condensation.

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

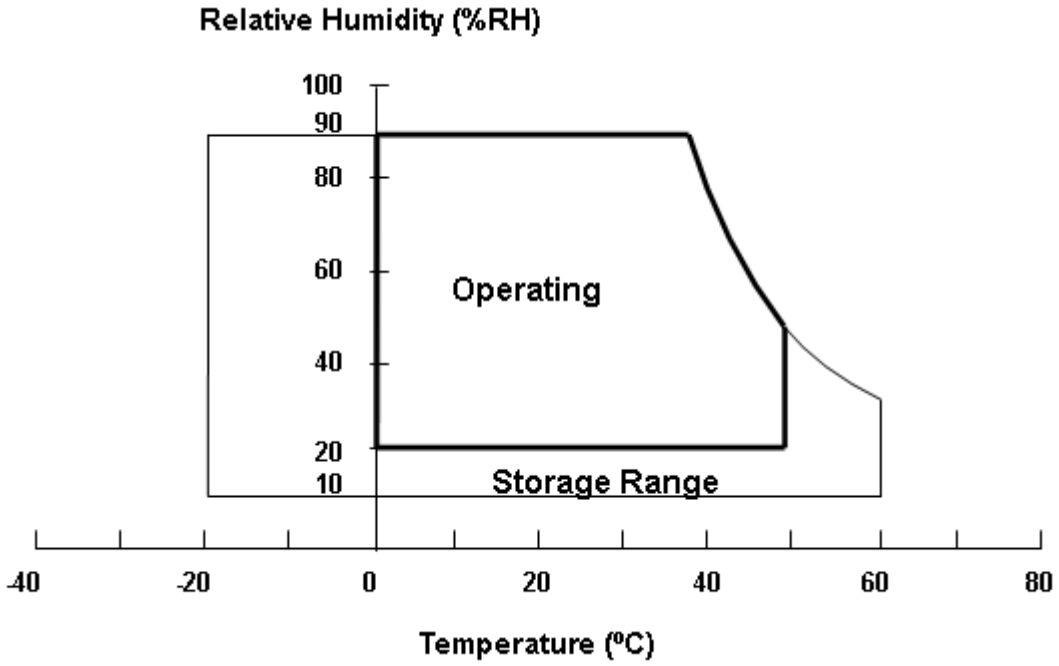

Note (2) The temperature of panel surface should be 0 ºC min. and 60 ºC max.

3.2 ELECTRICAL ABSOLUTE RATINGS

3.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min	Max		
Power Supply Voltage	V_{CC}	-0.3	6.0	V	(1)

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

3.3 ABSOLUTE RATINGS OF ENVIRONMENT (OPEN CELL)

High temperature or humidity may reduce the performance of panel. Please store LCD panel within the specified storage conditions.

Storage Condition: With packing.

Storage temperature range: 25±5 ºC.

Storage humidity range: 50±10%RH.

Shelf life: 30days

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

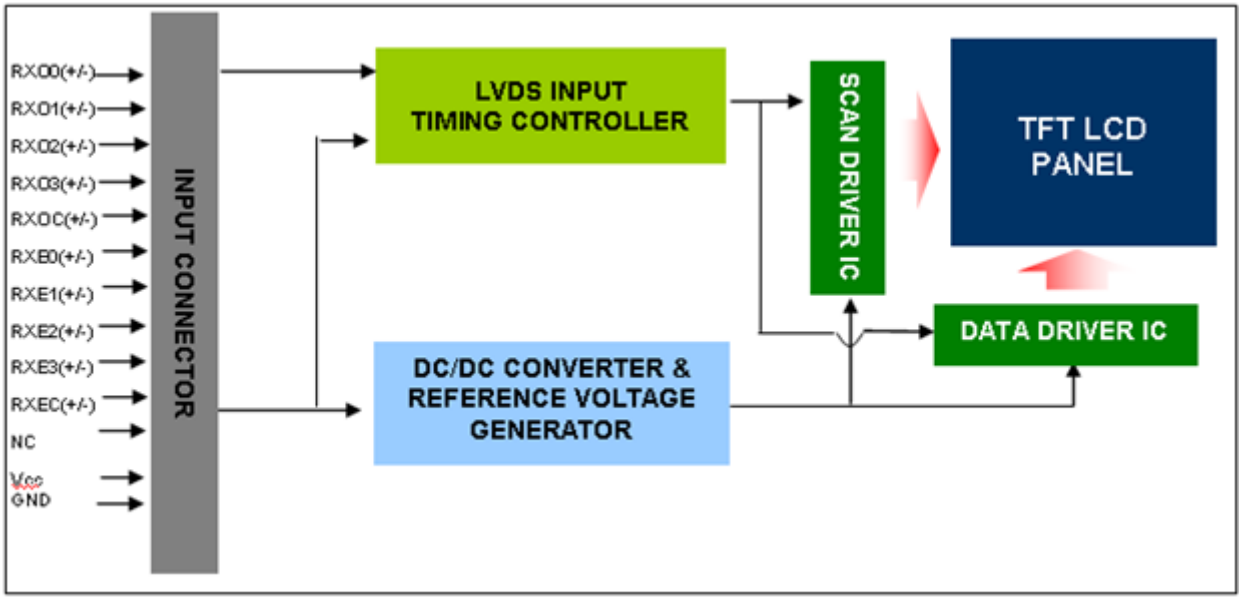

4.2. INTERFACE CONNECTIONS

PIN ASSIGNMENT

Pin	Name	Description
1	NC	Not connection, this pin should be open.
2	NC	Not connection, this pin should be open.
3	NC	Not connection, this pin should be open.
4	GND	Ground
5	RX0-	Negative LVDS differential data input. Channel 0
6	RX0+	Positive LVDS differential data input. Channel 0
7	GND	Ground
8	RX1-	Negative LVDS differential data input. Channel 1
9	RX1+	Positive LVDS differential data input. Channel 1
10	GND	Ground
11	RX2-	Negative LVDS differential data input. Channel 2
12	RX2+	Positive LVDS differential data input. Channel 2
13	GND	Ground
14	RXCLK-	Negative LVDS differential clock input.
15	RXCLK+	Positive LVDS differential clock input.
16	GND	Ground
17	RX3-	Negative LVDS differential data input. Channel 3
18	RX3+	Positive LVDS differential data input. Channel 3
19	GND	Ground
20	NC	Not connection, this pin should be open.
21	NC	Not connection, this pin should be open.
22	NC	Not connection, this pin should be open.
23	GND	Ground
24	GND	Ground
25	GND	Ground
26	Vcc	+5.0V power supply
27	Vcc	+5.0V power supply
28	Vcc	+5.0V power supply
29	Vcc	+5.0V power supply

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

30	Vcc	+5.0V power supply

Note (1) Connector Part No.:

GS23302-0011R-7H（FOXCONN） or 187106-30091[P-TWO(禾昌)]or equivalent

Note (2) The pixel is odd.

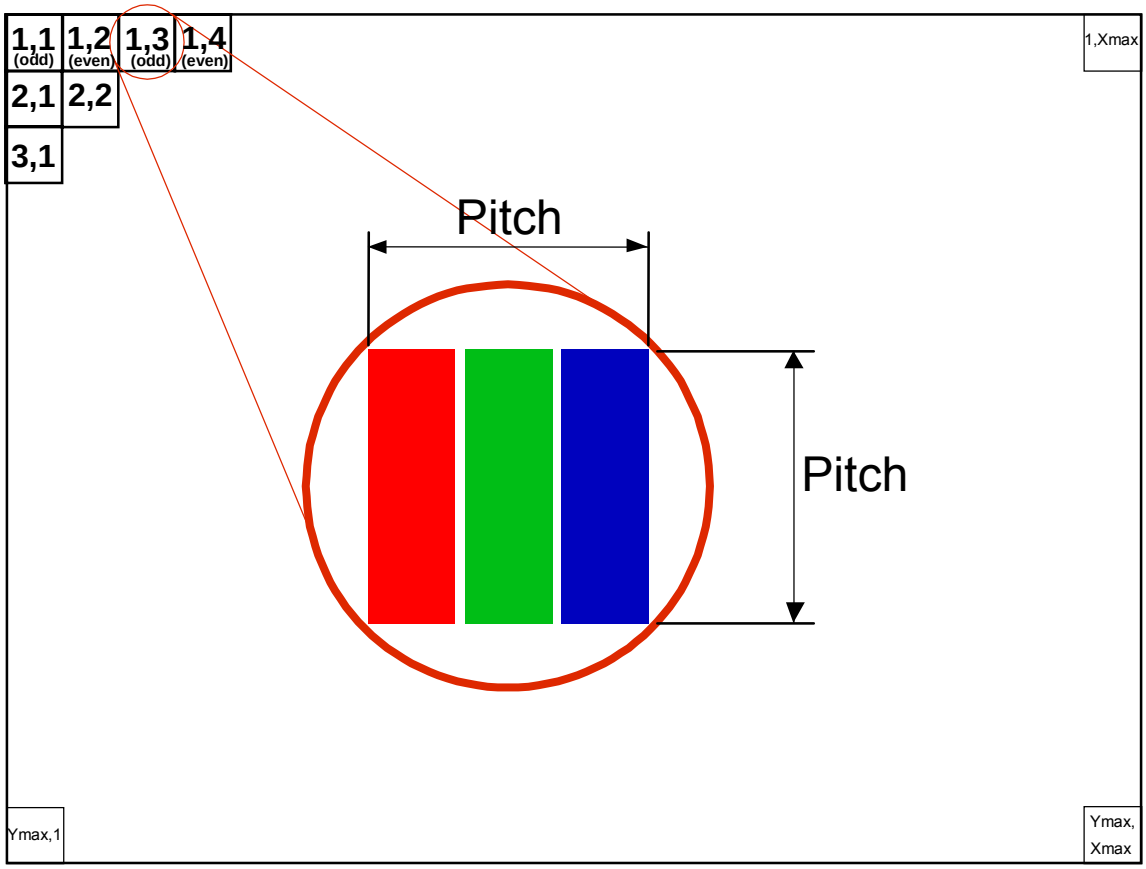

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

4.3 ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		Vcc	4.5	5	5.5	V	-
Ripple Voltage		V_{RP}	-	-	0.3	V	-
Rush Current		I_{RUSH}	-	1.5	2.0	A	(2)
Power Supply Current	White		-	350	450	mA	(3)a
	Black		-	550	700	mA	(3)b
	Vertical Stripe		-	550	700	mA	(3)c
Power Consumption		PLCD	-	2.75	3.85	Watt	(4)
LVDS differential input voltage		Vid	100	-	600	mV	
LVDS common input voltage		Vic	1.0	1.2	1.4	V	
Logic High Input Voltage		VIH	-	-	0.1	V	
Logic Low Input Voltage		VIL	-0.1	-	-	V	

Note (1) The ambient temperature is Ta = 25 ± 2 ºC.

Note (2) Measurement Conditions:

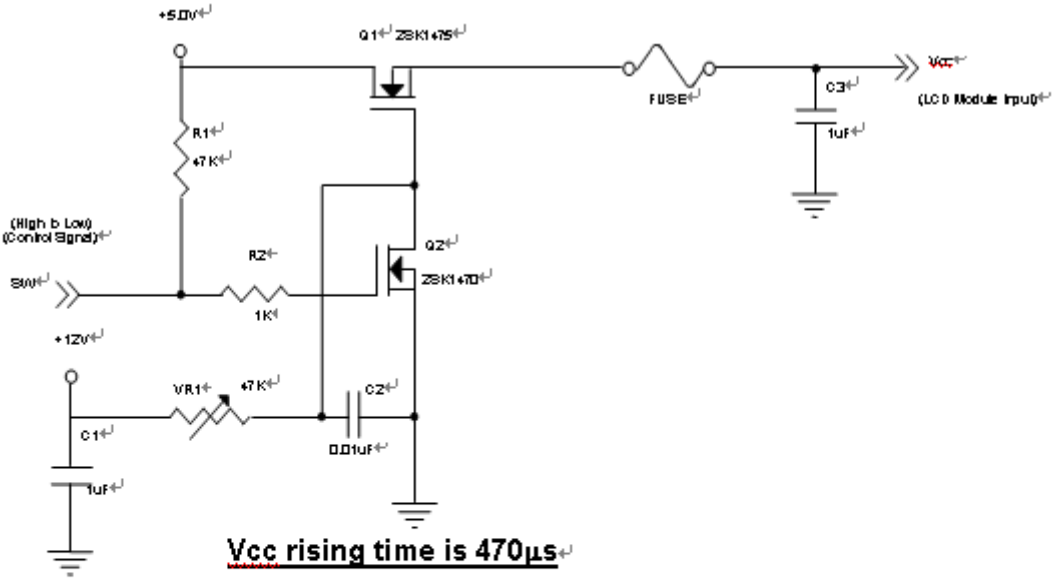

Vcc rising time is 470µs

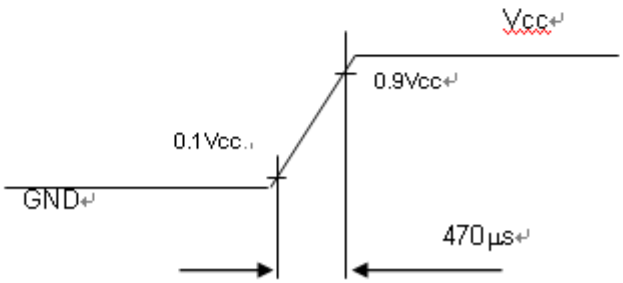

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (3) The specified power supply current is under the conditions at Vcc = 5.0 V, Ta = 25 ± 2 ºC, Fv = 75 Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern

b. Black Pattern

Active Area

c. Vertical Stripe Pattern

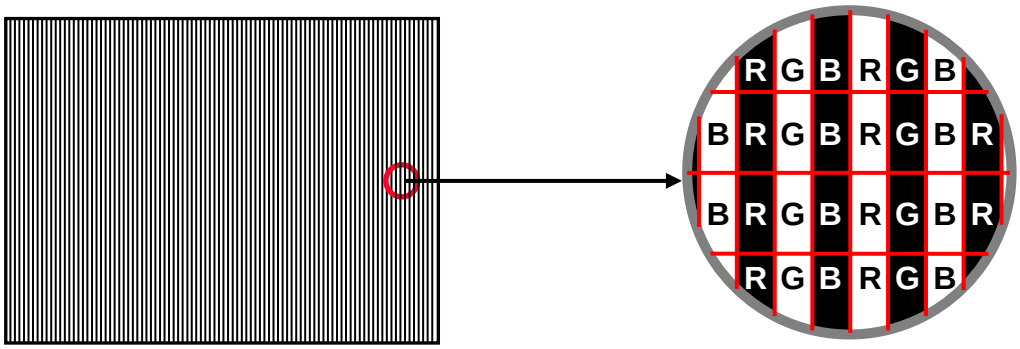

Active Area

Note (4) The power consumption is specified at the pattern with the maximum current.

Note (5) VID waveform condition

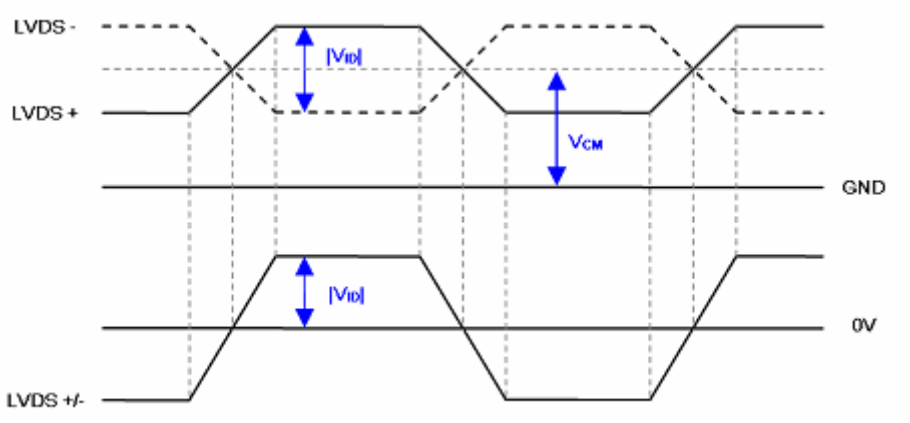

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

4.4 Vcc POWER DIP CONDITION

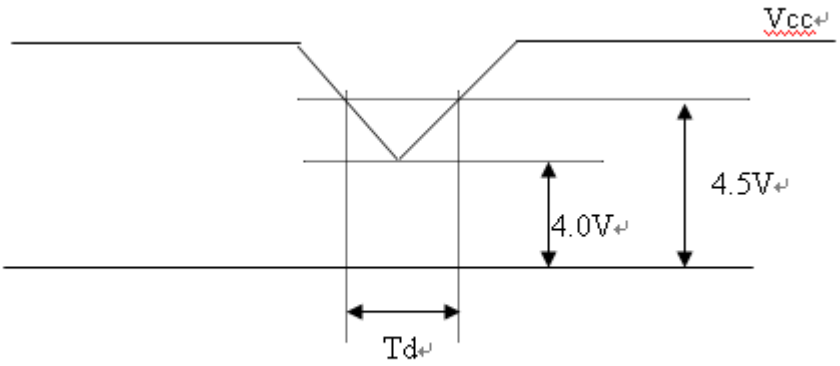

Dip condition: $4.0V \le Vcc \le 4.5V, Td \le 20ms$

4.5 LVDS DATA MAPPING TABLE

LVDS Channel O0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	OG0	OR5	OR4	OR3	OR2	OR1	OR0
LVDS Channel O1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	OB1	OB0	OG5	OG4	OG3	OG2	OG1
LVDS Channel O2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	OB5	OB4	OB3	OB2
LVDS Channel O3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	OB7	OB6	OG7	OG6	OR7	OR6

4.6 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																							
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	R7	R6	G5	G4	G3	G2	G1	G0	R7	R6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

4.7 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Clock	Frequency	Fc	62.9	75.4	95.6	MHz	-
	Period	Tc	10.5-	13.2	15.9-	ns	-
	Input cycle to cycle jitter	T_{rcl}	-0.02*Tc	--	0.02*Tc	ns	(1)
	Input Clock to data skew	TLVCCS	-0.02*Tc	-	-0.02*T	ps	(2)
	Spread spectrum modulation range	Fclkin_mod	Fc*97%	-	Fc*103%	MHz	(3)
	Spread spectrum modulation frequency	F_{SSM}	--	--	100	KHz	
Vertical Display Term	Frame Rate	Fr	50	60	76	Hz	Tv=Tvd+Tvb
	Total	Tv	800	806	815	Th	-
	Active Display	Tvd	--	768	--	Th	-
	Blank	Tvb	32	38	47	Th	-
Horizontal Display Term	Total	Th	1500	1560	1570	Tc	Th=Thd+Thb
	Active Display	Thd	--	1366	--	Tc	--
	Blank	Thb	134	194	204	Tc	--

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note:(0) Because this module is operated by DE only mode, Hsync and Vsync input signals are ignored.

INPUT SIGNAL TIMING DIAGRAM

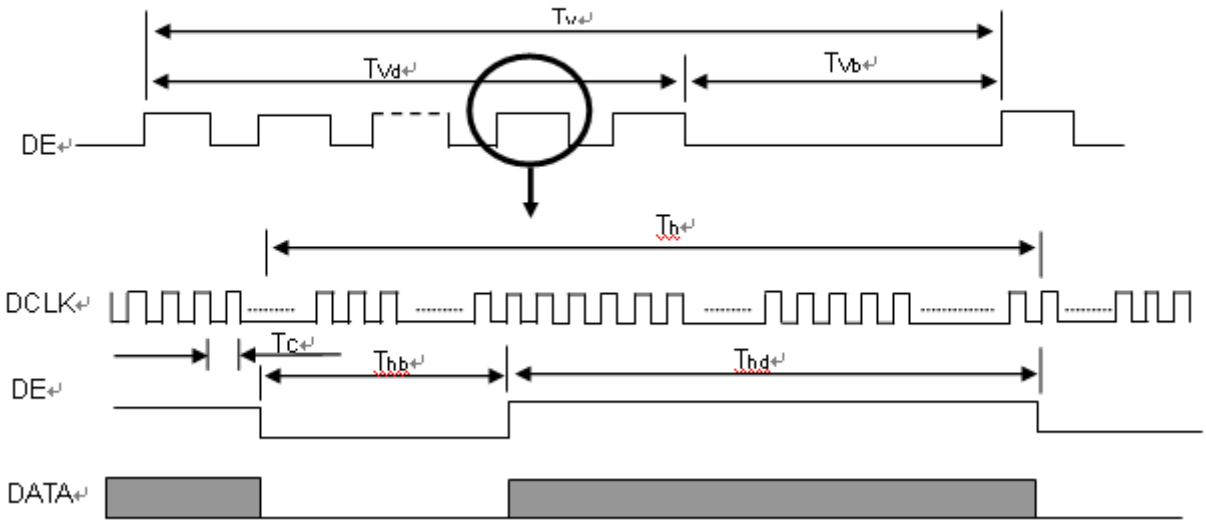

Note (1) The input clock cycle-to-cycle jitter is defined as below figures. Trcl = I T1 – TI

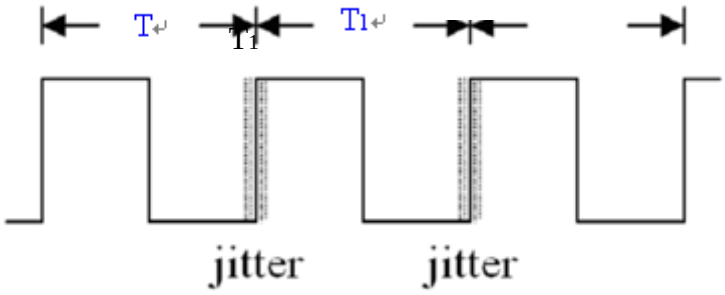

Note (2) The SSCG (Spread spectrum clock generator) is defined as below figures.

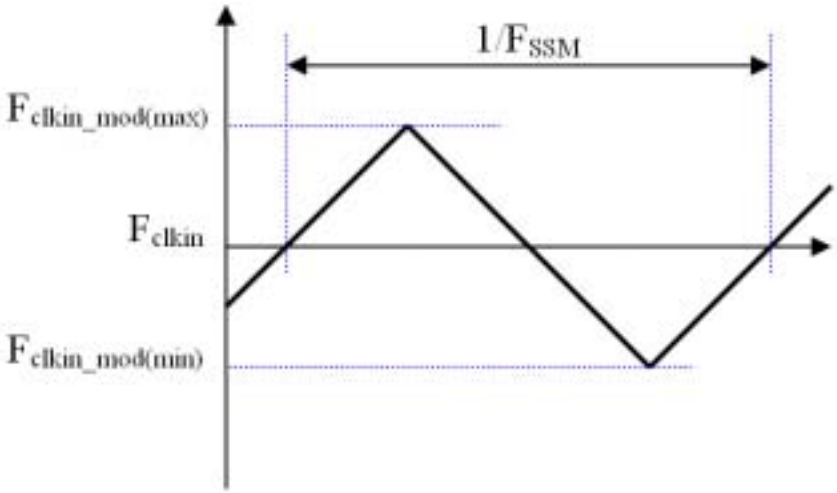

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (3) Input Clock to data skew is defined as below figures

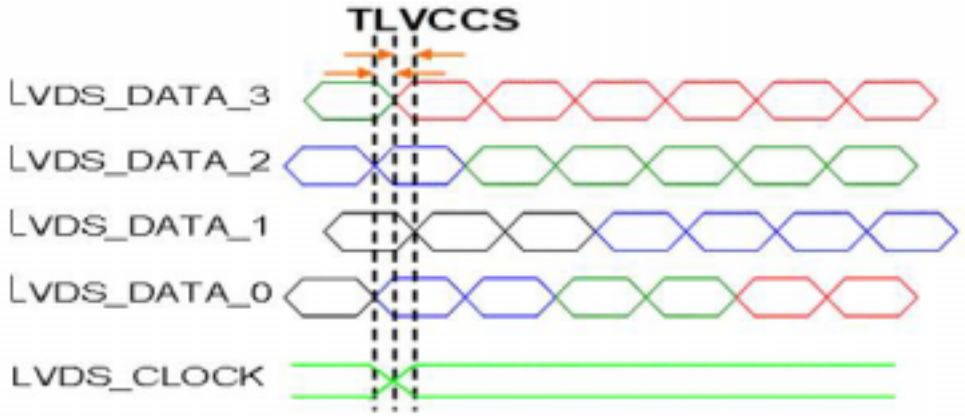

4.8 POWER ON/OFF SEQUENCE

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.

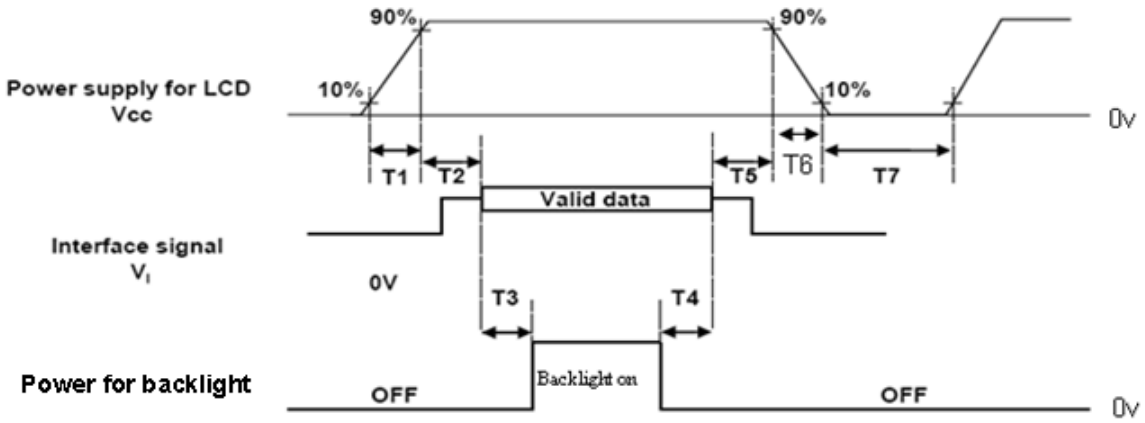

Timing Specifications:

Parameters	Values			Units
	Min	Typ.	Max	
T1	0.1	-	10	ms
T2	0	30	50	ms
T3	200	250	-	ms
T4	100	250-	-	ms
T5	0	20-	50	ms
T6	0.1	-	50	ms
T7	1000	-	-	ms

Note (1) The supply voltage of the external system for the module input should be the same as the definition of Vcc.

Note (2) When the backlight turns on before the LCD operation of the LCD turns off, the display may momentarily become abnormal screen.

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (3) In case of VCC = off level, please keep the level of input signals on the low or keep a high impedance.

Note (4) T4 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Note (6) CMI won't take any responsibility for the products which are damaged by the customers not following the Power Sequence.

Note (7) There might be slight electronic noise when LCD is turned off (even backlight unit is also off). To avoid this symptom, we suggest "Vcc falling timing" to follow "t6 spec".

5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V_{CC}	5	V
Input Signal	According to typical value in "4.3 ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current Per Input Pin	I_{PIN}	65 ± 1.9	mA_{DC}
PWM Duty Ratio	D	100	%
LED Light Bar Test Converter	TEST01001 T2-A1		

5.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown as below. The following items should be measured under the test conditions described in 5.1 and stable environment shown in Note (6).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Color Chromaticity (CIE 1931)	Red	Rx	θx=0° , θY =0° CS-2000 R=G=B=255 Gray Scale	Typ – 0.03	0.641	Typ + 0.03	--	(1), (5)
		Ry			0.340			
	Green	Gx			0.315			
		Gy			0.629			
	Blue	Bx			0.159			
		By			0.051			
	White	Wx			0.313			
		Wy			0.329			
Center Transmittance		T%		--	6.2	--	%	(1), (5)
Contrast Ratio		CR		500	700	-	-	(2), (5)
Response Time		TR	θx=0° , θY =0°	-	1.5	4.0	ms	(3)
		TF		-	3.5	6.0		
White Variation		δW	θx=0° , θY =0° USB2000	75	-	-	%	(5), (6)
Viewing Angle	Horizontal	x- + x+	CR ≧ 10 USB2000	80	90	-	Deg.	(1), (6)
	Vertical	y- + y+		55	65	-		
Viewing Angle	Horizontal	x- + x+	CR ≧ 5 USB2000	100	110	---	Deg.	(1), (5)
	Vertical	y- + y+		75	85			

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (0) Light source is the standard light source “C” which is defined by CIE and driving voltages are based on suitable gamma voltages

Note (1) Light source is the BLU, which is supplied by CMI, and driving voltages are based on suitable gamma voltages. White is without signal input and R, G, B are with signal input. SPEC is judged by CMI’s golden sample

Note (2) Definition of Viewing Angle (θx, θy):

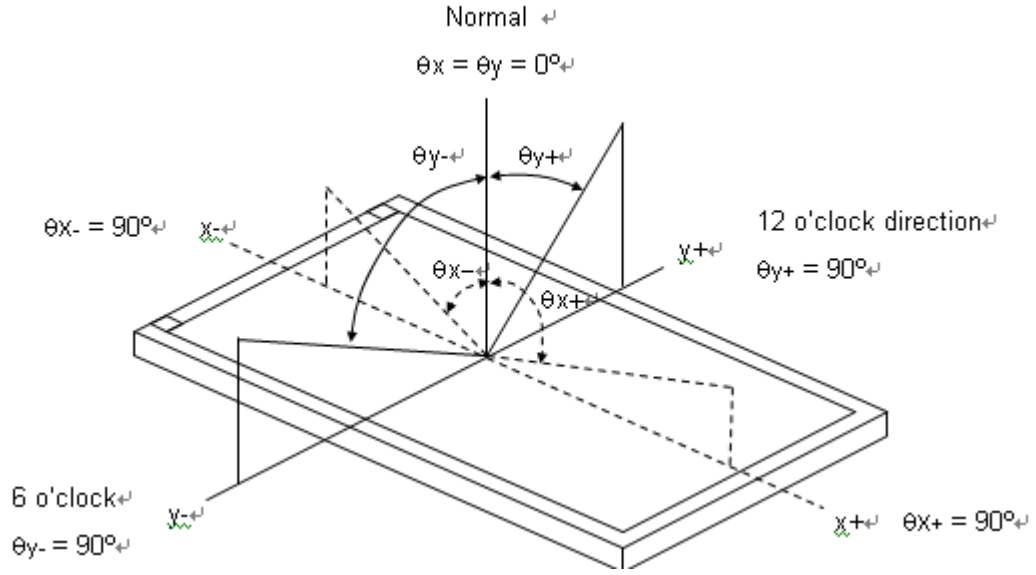

Note (3) : Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L255 / L0

L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (8).

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (4) Definition of Response Time (TR, TF):

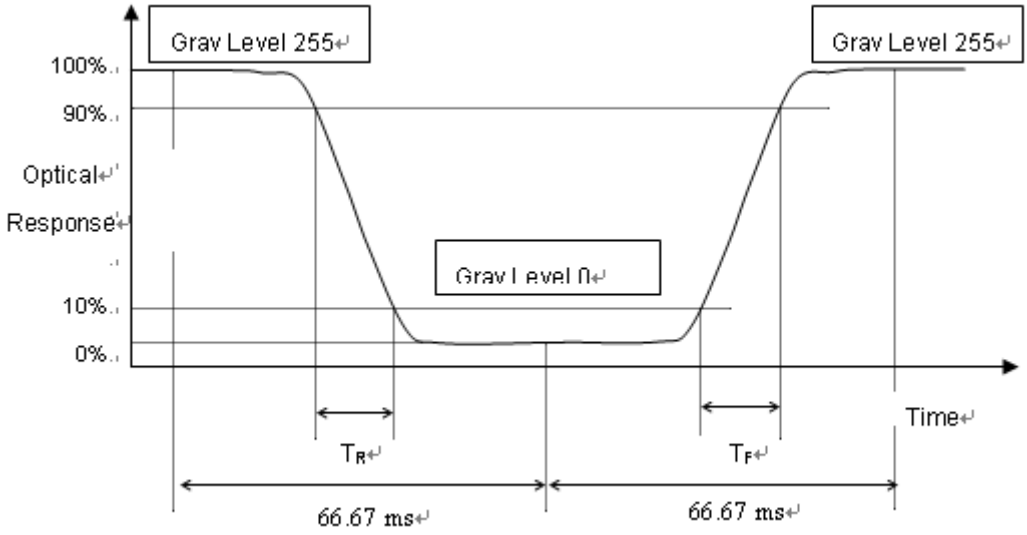

Note (5) Definition of Transmittance (T%):

Module is without signal input.

$$\text{Transmittance} = \frac{\text{Luminance of LCD module } L(5)}{\text{Luminance of backlight } L_{BLU}(5)} * 100\%$$

L (X) and $L_{BLU}(X)$is corresponding to the luminance of the point X at Figure in Note (8).

Note (6) Measurement Setup:

The LCD module should be stabilized at given temperature for 20minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20minutes in a windless room.

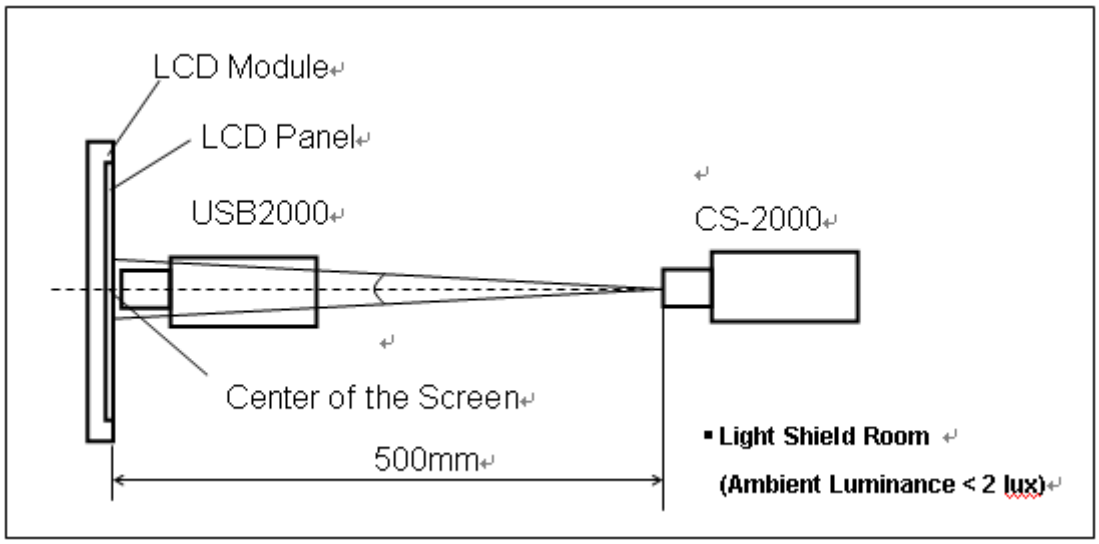

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

Note (7) : Measurement Setup:

The LCD Panel should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after light source “C” for 30 minutes in a windless room.

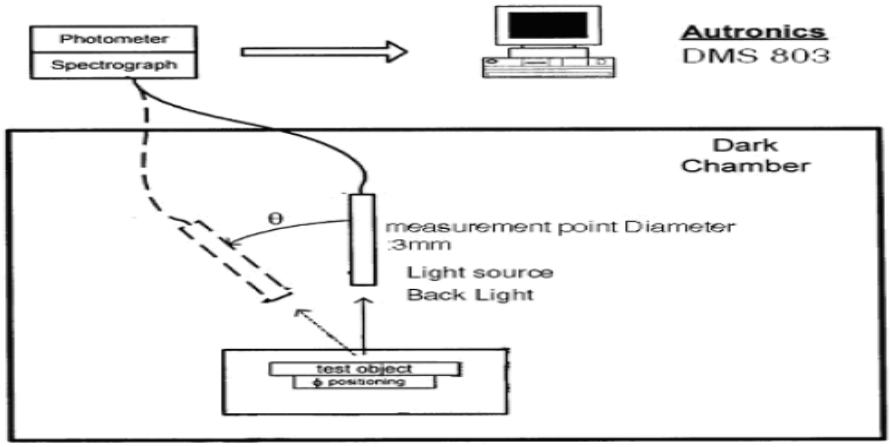

DMS 803

Note (8) : Definition of Transmittance Variation (δT%):

Measure the transmittance at 9 points

$$\delta T\% = \frac{\text{Maximum [T\%(1), T\%(2), … T\%(9)]}}{\text{Minimum [T\%(1), T\%(2), … T\%(9)]}}$$

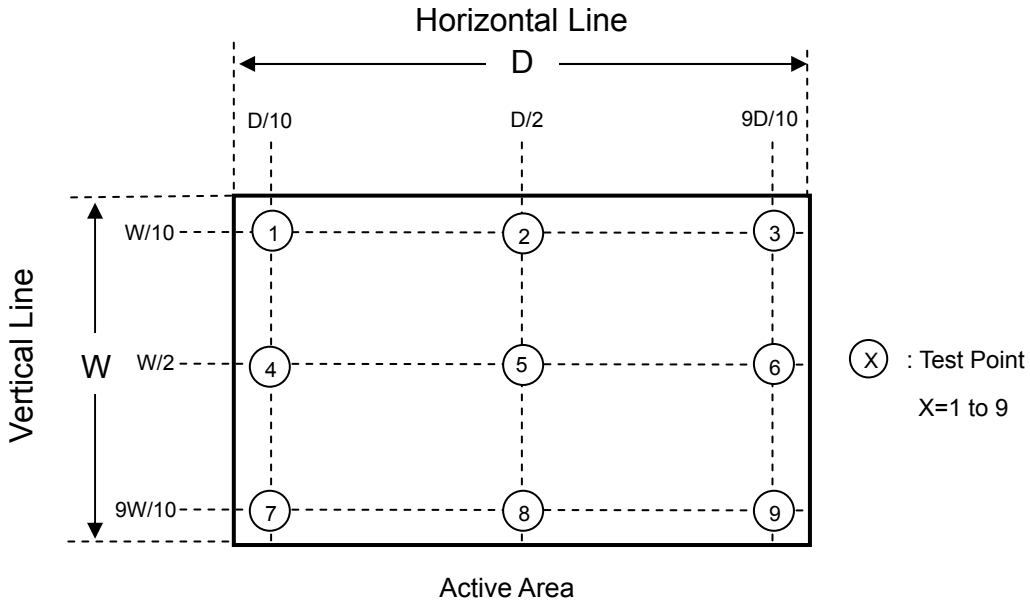

Active Area

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

5.3 Flicker Adjustment

Flicker must be finely adjusted after module assembling and aging. Please follow the instructions below.

(1) Adjustment Pattern: 1+2 line checker pattern as follows

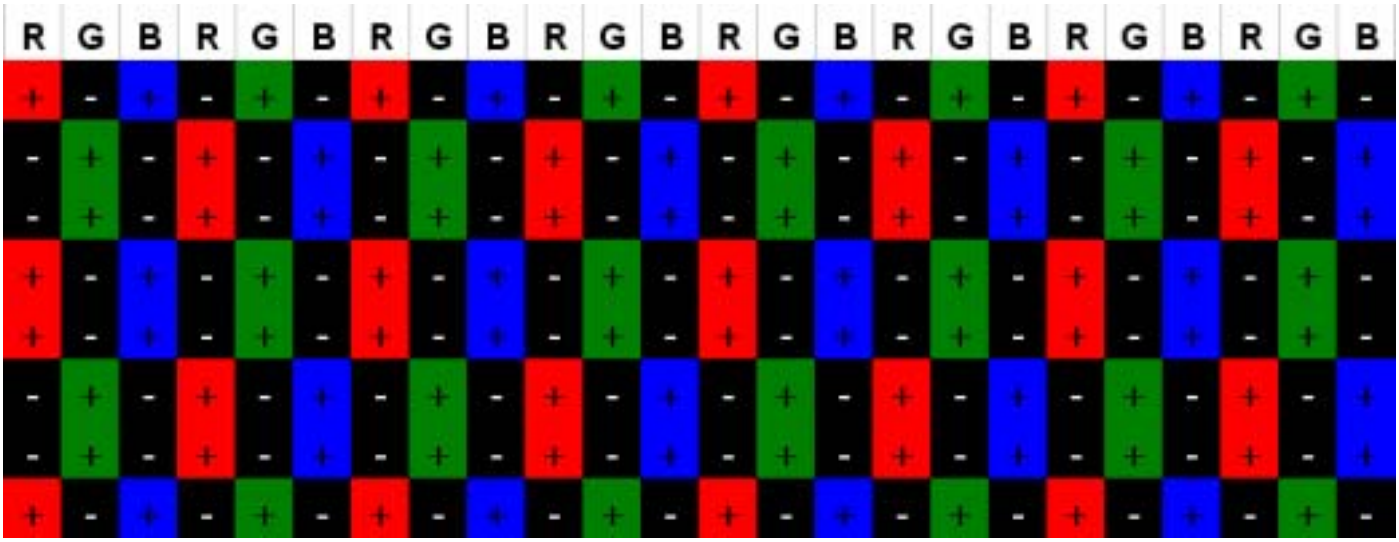

(2) Adjustment Method:

Flicker should be adjusted by turning the volume for flicker adjustment by the ceramic driver. It is adjusted to the point with least flickering of the whole screen. After making it surely overrun at once, it should be adjusted to the optimum point.

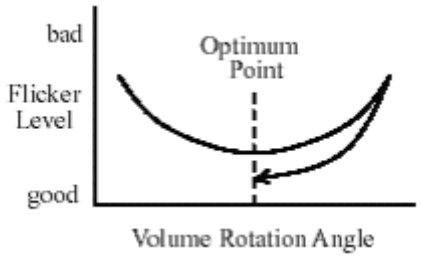

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

6. RELIABILITY TEST ITEM

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50℃, 80%RH, 240hours	(1)
High Temperature Operation (HTO)	Ta= 50℃, 50%RH , 240hours	
Low Temperature Operation (LTO)	Ta= 0℃, 240hours	
High Temperature Storage (HTS)	Ta= 60℃, 240hours	
Low Temperature Storage (LTS)	Ta= -20℃, 240hours	
Package Vibration Test	ISTA STANDARD 1.14Grms Random, Frequency Range: 1 ~ 200 Hz Top & Bottom: 30 minutes (+Z), 10 min (-Z), Right & Left: 10 minutes (X) Back & Forth 10 minutes (Y)	(2)
Thermal Shock Test (TST)	-20℃/30min, 60℃ / 30min, 100 cycles	(1)
On/Off Test	25℃, On/10sec, Off /10sec, 30000 cycles	
Altitude Test	Operation: 10000 ft / 24hours Non-Operation: 30000 ft / 24hours	

Note (1) The tests are done with LCD modules (M185BGE-L23).

Note (2) The test is done with a package shown in Section 8.

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

7. LABEL

7.1 CMI OPEN CELL LABEL

The barcode nameplate is pasted on each OPEN CELL as illustration for CMI internal control.

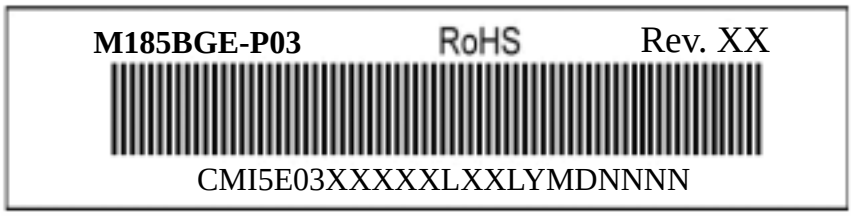

Barcode definition:

Serial ID: CM-I5E03-X-X-X-XX-L-XX-L-YMD-NNNN

Code	Meaning	Description
CM	Supplier code	CMI=CM
I5E03	Model number	M185BGE-P03=I5E03
X	Revision code	C1:1, C2:2, …
X	Source driver IC code	Century=1, CLL=2, Demos=3, Epson=4, Fujitsu=5, Himax=6, Hitachi=7, Hynix=8, LDI=9, Matsushita=A, NEC=B, Novatek=C, OKI=D, Philips=E, Renasas=F, Samsung=G, Sanyo=H, Sharp=I, TI=J, Topro=K, Toshiba=L, Windbond=M
X	Gate driver IC code	
XX	Cell location	Tainan, Taiwan=TN
L	Cell line #	1,2,~,9,A,B,~,Y,Z
XX	Module location	Tainan, Taiwan=TN ; Ningbo China=NP
L	Module line #	1,2,~,9,A,B,~,Y,Z
YMD	Year, month, day	Year: 2001=1, 2002=2, 2003=3, 2004=4… Month: 1~12=1, 2, 3, ~, 9, A, B, C Day: 1~31= 1, 2, 3, ~, 9, A, B, C, ~, T, U, V
NNNN	Serial number	Manufacturing sequence of product

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

8. PACKING

8.1 Packing Information

(1) 15 LCD Open CELL / 1 Box

(2) Box dimensions: 530 (L) X 385 (W) X 93 (H)

(3) 900 PCS LCD Panels/ 1 Group

8.2 CARTON

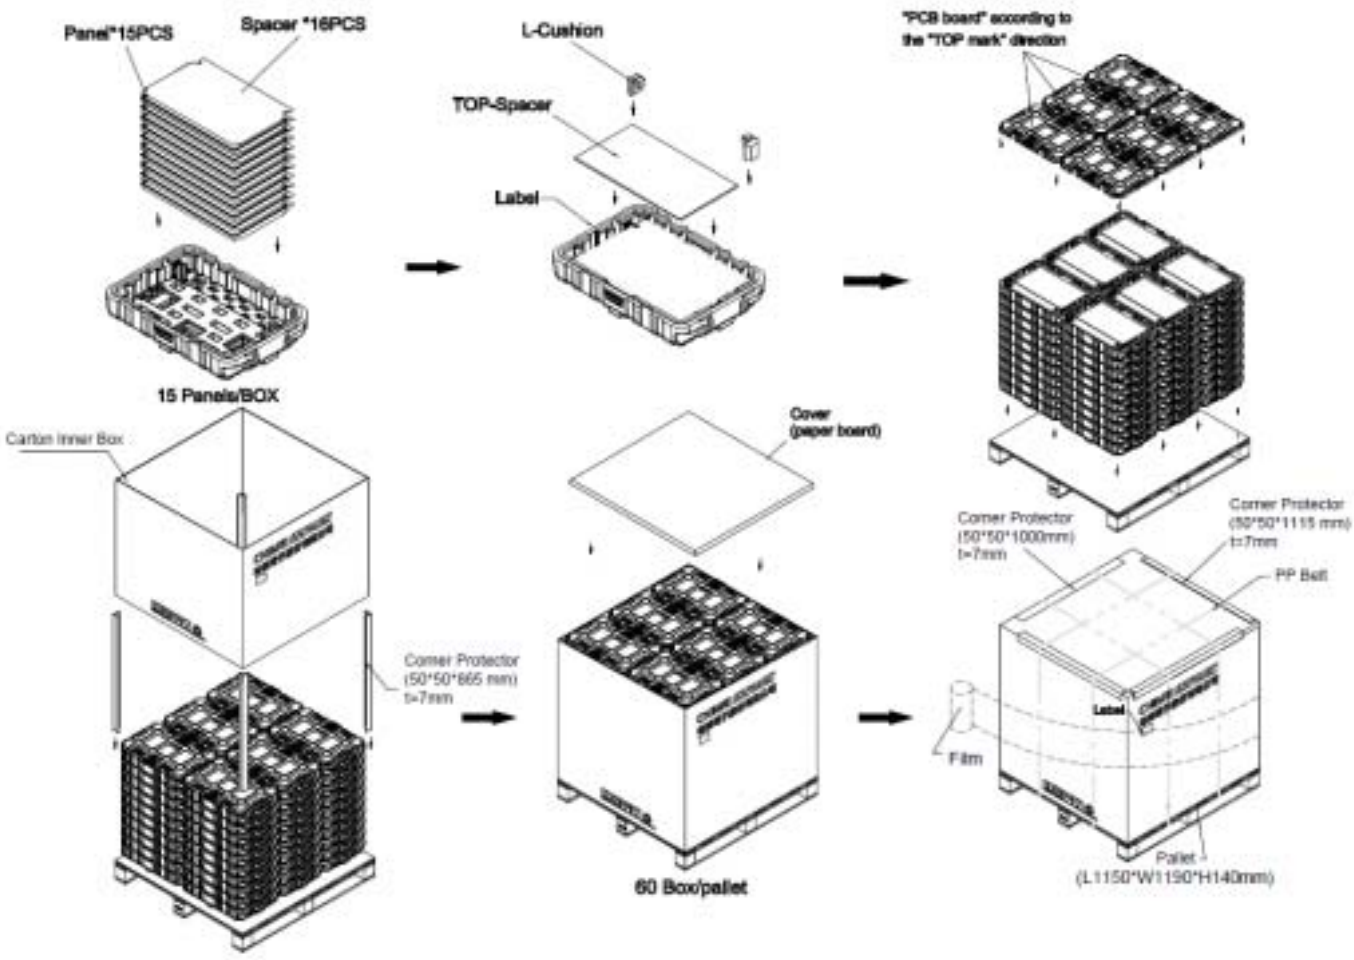

Figure. 8-1 Packing method

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

8.3 PALLET

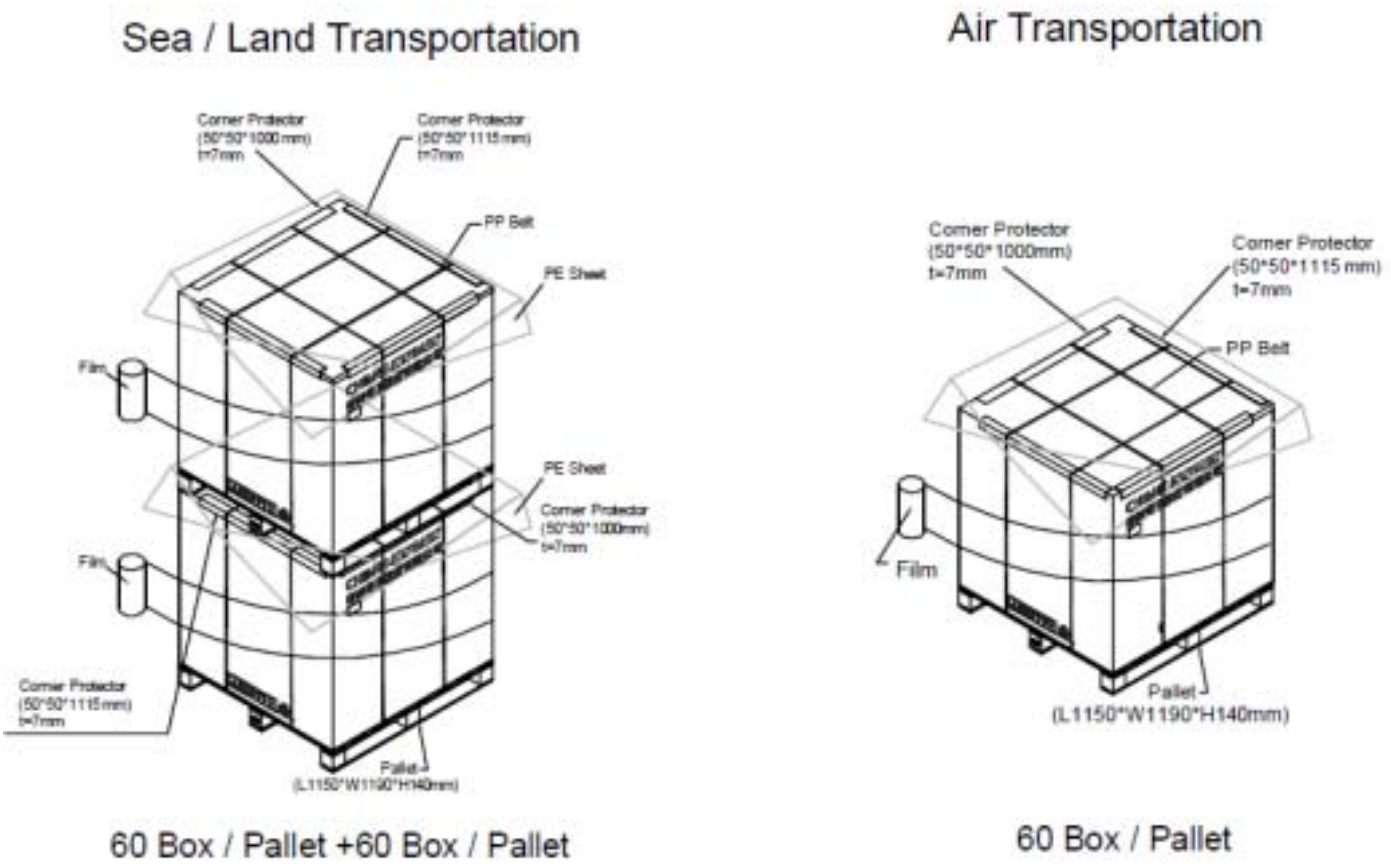

Figure. 8-2 Packing method

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

9. PRECAUTIONS

9.1 HANDLING PRECAUTIONS

(1) Do not apply rough force such as bending or twisting to the product during assembly.

(2) To assemble backlight or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.

(3) It is not permitted to have pressure or impulse on the module because the LCD panel will be damaged.

(4) Always follow the correct power sequence when the product is connecting and operating. This can prevent damage to the CMOS LSI chips during latch-up.

(5) Do not pull the I/F connector in or out while the module is operating.

(6) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.

(7) It is dangerous that moisture come into or contacted the product, because moisture may damage the product when it is operating.

(8)High temperature or humidity may reduce the performance of module. Please store this product within the specified storage conditions.

(9) When ambient temperature is lower than 10ºC may reduce the display quality. For example, the response time will become slowly.

9.2 SAFETY PRECAUTIONS

(1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(2) After the product's end of life, it is not harmful in case of normal operation and storage.

9.3 OTHER

(1) When fixed patterns are displayed for a long time, remnant image is likely to occur.

10. OUTLINE DRAWING

The copyright belongs to CHIMEI InnoLux. Any unauthorized use is prohibited.

DETAIL K
SCALE 5:1

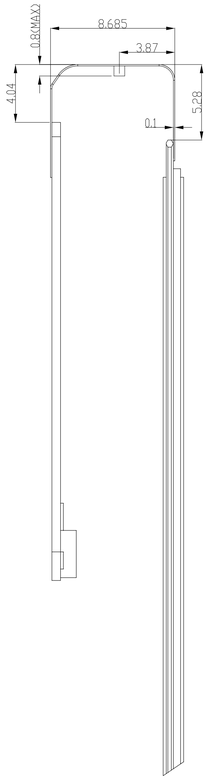

SEE DETAIL K

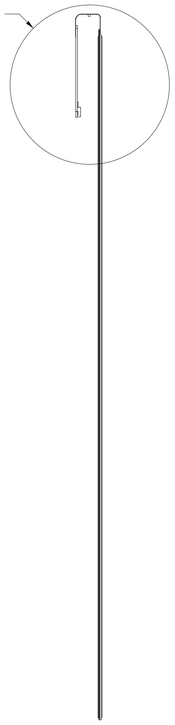

SCALE 10:1

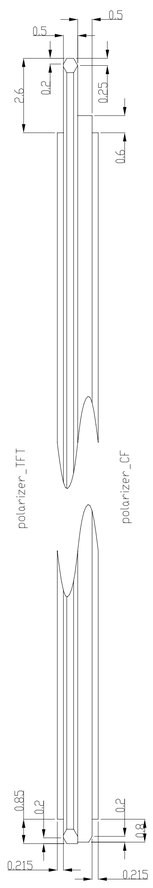

SEE DETAIL J

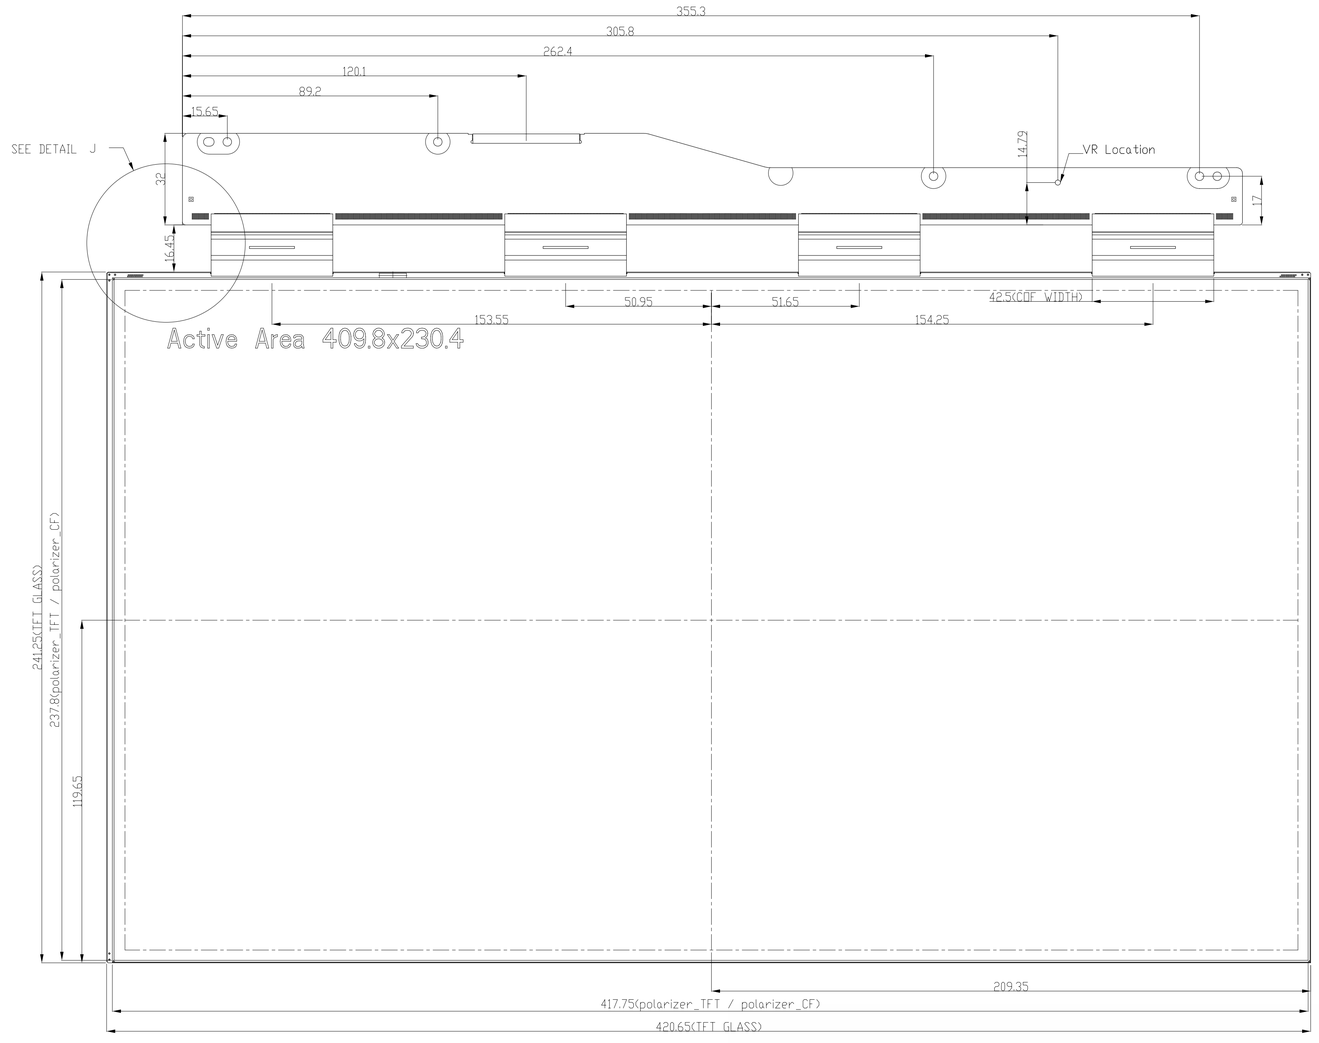

DETAIL J
SCALE 2:1



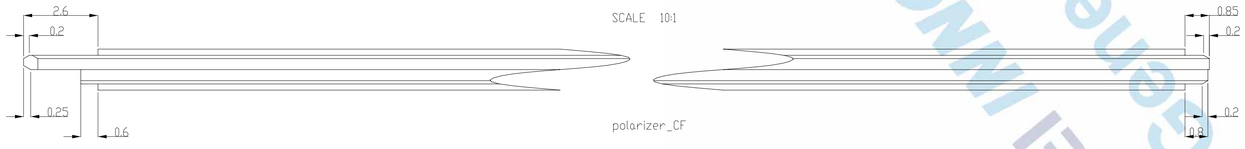

UNIT: mm	GENERAL LINEAR TOLERANCE			
DIMENSION	1	2	3	
0 < 6	0.05	0.1	0.2	REJECT LEVEL
6 < 14	0.1	0.2	0.3	
14 < 63	0.1	0.2	0.4	
63 < 250	0.2	0.4	0.6	2
250 < 630		0.6	1.0	
630 < 4000			1.6	
UNIT: DEGREE	GENERAL ANGULAR TOLERANCE			
LEVEL	1	2	3	
RANGE	±°	±°	±°	

CCP: CPK DIMENSION	CONTROL DIMENSION	DATE	SCALE 1/1 UNIT mm
APPROVED		PART NUMBER or FSN NUMBER	DRAWING REV
CHECKED		PART DESCRIPTION Panel_M185BGE-P03	SHEET NUMBER
DESIGNED	CHIMEI INNOLUX		SIZE A1

CHIMEI INNOLUX General
版權屬於奇美電子所有 禁止任何未經授權的使用.
The copyright belongs to Chimei InnoLux . Any unauthorized use is prohibited.